# FaceStation

Next Generation Face Recognition Terminal



FaceStation The new FaceStation is a dedicated face recognition terminal which prevides a perfect combination of convenience and high security. Optimizing Suprema's renowned biometric technology combined with state-of-the-art hardware, FaceStation allows fast and accurate access control security like no other product in the market . FaceStation comes with a wide array of features & functions, which can be assessed through a intuitive touch screen GUI. The device also features embedded web server for easier device control, and supports both analog and digital video phone integration.



## suprema FaceStation

### Next Generation Face Recognition Terminal



#### **Features**



Intelligent Face Recognition Technology
Allows fast & easy recognition with higher security



**Intuitive Touch Screen GUI** 

4.3" touchscreen LCD with easy-to-use GUI



**Embedded Web Server** 

Preloaded with BioStar Lite embedded web server



**Ultra Performance** 

Covers up to 10,000 users with powerful dual CPU



**Versatile Interfaces** 

PoE, WiFi, TCP/IP, RS485/232, Wiegand, relay



**Video Phone** 

IP based video and audio interface or analog video phone



**Built-in Card Reader** 

13.56MHz Mifare/DesFire

#### Secure I/O

- External Relay unit for secure door control and I/O expansion
- Encrypted communication for enhanced security

\*16MHz 8 bit microprocessor

\*4 digital inputs and 2 relay outputs

\*Dimension:

143 x 82 x 35 mm (W x H x D)




#### Intuitive touch screen GUI of FaceStation



#### **Specications**

CPU	1.1 GHz DSP, 667MHz RISC
Memory	4GB ash, 512MB RAM
LCD	4.3 inch WVGA touch screen
Camera	Face recognition, face log, videophone
RF Card Options	13.56MHz Mifare/DesFire
Template Capacity	10,000 (1:1), 1,000 (1:N)
Max User	10,000
Log Capacity	1,000,000 / 10,000 image logs
PoE	Yes
Interfaces	Wireless LAN(optional), TCP/IP, Wiegand
	2ch RS485, RS232, 4 x TTL I/O, 2 x Rela
	USB (Host & Slave)
Tamper	Switch
Sound	16 bit Hi-Fi voice & sound indication
Operating Temp.	- 20°C ~ 50°C
Operating Voltage	12V DC
Dimensions (mm)	132(W) x 165(H) x 60(D)
Certicates	CE, FCC, KCC, RoHS

#### **System Conguration**

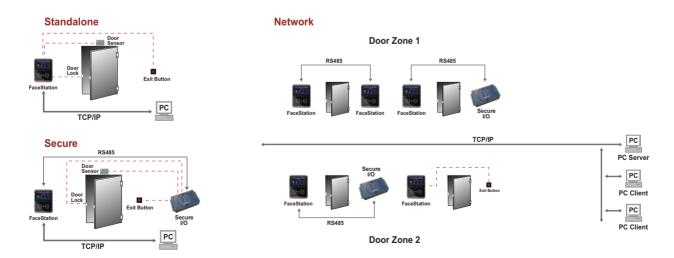

Intelligent Biometric Controls, Inc. 601A Brooklyn Dr, Milford, OH 45150 USA

Tel: 866-400-9292 Fax: 513-239-6328 E-mail: info@fingerprintdoorlocks.com

Homepage: Suprema.FingerprintDoorLocks.com

